

**BIRCH, STEWART, KOLASCH & BIRCH, LLP**

TERRELL C. BIRCH  
RAYMOND C. STEWART  
JOSEPH A. KOLASCH  
JAMES M. SLATTERY  
BERNARD L. SWEENEY\*  
MICHAEL K. MUTTER  
CHARLES GORENSTEIN  
GERALD M. MURPHY, JR.  
LEONARD R. SVENSSON  
TERRY L. CLARK  
ANDREW D. MEIKLE  
MARC S. WEINER  
JOE MCKINNEY MUNCY  
ROBERT J. KENNEY  
DONALD J. DALEY  
JOHN W. BAILEY  
JOHN A. CASTELLANO, III  
OF COUNSEL:  
HERBERT M. BIRCH (1905-1996)  
ELLIOT A. GOLDBERG\*  
WILLIAM L. GATES\*  
EDWARD H. VALANCE  
RUPERT J. BRADY (RET.)\*  
\*ADMITTED TO A BAR OTHER THAN VA.

INTELLECTUAL PROPERTY LAW  
8110 GATEHOUSE ROAD  
SUITE 500 EAST  
FALLS CHURCH, VA 22042-1210  
USA

(703) 205-8000

FAX: (703) 205-8050  
(703) 698-8590 (G IV)

e-mail: mailroom@bskb.com  
web: http://www.bskb.com

CALIFORNIA OFFICE  
650 TOWN CENTER DRIVE, SUITE 1120  
COSTA MESA, CA 92626-7125  
(714) 708-8555  
FAX: (714) 708-8565

GARY D. YACURA  
THOMAS S. AUCHTERLONIE  
MICHAEL R. CAMMARATA  
JAMES T. ELLER, JR.  
SCOTT L. LOWE  
MARY ANN CAPRIA  
MARK J. NUELLE, PH.D.  
DARIN E. BARTHOLOMEW  
D. RICHARD ANDERSON  
PAUL C. LEWIS  
W. KARL RENNER

REG. PATENT AGENTS:  
FREDERICK R. HANDREN  
ANDREW J. TELESZ, JR.  
MARYANNE LIOTTA, PH.D.  
MAKI HATSUMI  
MIKE S. RYU  
CRAIG A. MCROBBIE  
GARTH M. DAHLEN, PH.D.  
LAURA C. LUTZ  
ROBERT E. GOOZNER, PH.D.  
HYUNG N. SOHN  
MATTHEW J. LATTIG  
ALAN PEDERSEN-GILES

10/01/99  
09/410751  
Jc408 U.S. PRO

10/01/99  
Jc408 U.S. PRO

Date: October 1, 1999  
Docket No.: 2950-0138P

Assistant Commissioner for Patents  
Box PATENT APPLICATION  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): YOO, Jea-Yong  
KIM, Byung-Jin; SEO, Kang-Soo

For: METHOD AND APPARATUS FOR RECORDING DIGITAL DATA STREAMS

Enclosed are:

- X A specification consisting of 19 pages
- X 6 sheet(s) of Formal drawings
- X An assignment of the invention
- X Certified copy of Priority Document(s)
- X Executed Declaration X Original      Photocopy
- A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27
- Preliminary Amendment
- Information Disclosure Statement, PTO-1449 and reference(s)

Other \_\_\_\_\_

The filing fee has been calculated as shown below:

LARGE ENTITY				SMALL ENTITY	
FOR	NO. FILED	NO. EXTRA	RATE FEE		RATE FEE
BASIC FEE	***** ***** *****	***** ***** *****	***** ***** \$760.00 *****	or	***** ***** \$380.00 *****
TOTAL CLAIMS	19 - 20 =	0	x18 =\$ 0.00	or	x 9 = \$ 0.00
INDEPENDENT	7 - 3 =	4	x78 =\$ 312.00	or	x 39 = \$ 0.00
MULTIPLE DEPENDENT CLAIM PRESENTED <u>no</u>			+260 = \$ 0.00	or	+130 = \$ 0.00
TOTAL \$1,072.00				TOTAL \$ 0.00	

X A check in the amount of \$1,112.00 to cover the filing fee and recording fee (if applicable) is enclosed.

\_\_\_\_\_ Please charge Deposit Account No. 02-2448 in the amount of \$\_\_\_\_\_. A triplicate copy of this transmittal form is enclosed.

\_\_\_\_\_ No fee is enclosed.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. 1.16 or under 37 C.F.R. 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By

JOSEPH A. KOLASCH

Reg. No. 22,463

P. O. Box 747

Falls Church, Virginia 22040-0747

(703) 205-8000  
JAK/dll

667007 " 73207460

# **METHOD AND APPARATUS FOR RECORDING DIGITAL DATA STREAMS**

## **BACKGROUND OF THE INVENTION**

### **1. Field of the Invention**

The present invention relates to a method and  
5 apparatus for recording a digital data stream received by a  
set top box and transmitted through a communication  
interface on a streamer, with the capability of  
compensating the arrival time of the received digital data  
stream and adding the compensated arrival time to the data  
10 stream as transport time references of the data stream.

### **2. Description of the Related Art**

In conventional analog television broadcast, video  
signals are transmitted over the air or through cables  
after being AM or FM modulated. With the recent rapid  
15 advance of digital technologies such as digital image  
compression or digital modulation/ demodulation,  
standardization for digital television broadcast is in  
rapid progress. Based upon the Moving Picture Experts Group  
(MPEG) format, satellite and cable broadcast industry also

moves towards digital broadcast.

Digital broadcast offers several advantages that its analog counterpart cannot provide. For example, digital broadcast is capable of providing services with far more improved video/audio quality, transmitting several different programs within a fixed bandwidth, and offering enhanced compatibility with digital communication media or digital storage media.

FIG. 1 depicts a simplified block diagram of an MPEG encoder. An audio/video encoder 11 converts source audio and video signals into a video elementary stream and one or more audio elementary streams. The compressed audio and video elementary streams are converted into packets by a program elementary stream (PES) packetizer 13, wherein a presentation time stamp (PTS) and decoding time stamp (DTS) are inserted into each PES packet header. Both PTS and DTS are expressed in terms of an encoder system clock 15 and used by a decoder to synchronize the decoder time clock with the encoder system clock. The audio and video PES packets generated from a number of different programs are multiplexed into a transport stream (TS), wherein program clock references (PCRs) are inserted in the transport stream packet headers.

The transport stream, as shown in FIG. 3, comprises a series of transport stream packets, each transport stream packet having a fixed length of 188 bytes. The transport stream is to be transported through channels subject to transmission errors. Each transport stream packet further comprises a packet header and payload. The packet header includes a synchronization value, for use in identifying the boundaries of each transport stream packet, followed by a packet identifier or PID. The purpose of the PID is to label the transport stream packet. All packets with a

particular PID have related contents, e.g., all have PES packet data for a particular elementary stream, etc. In digital broadcast systems, a plurality of programs can be multiplexed into a single transport stream.

5        Each program has a single time base established by a system time clock at the encoder in relation to which all elementary streams of the particular program are encoded. The system time clock typically has a frequency of 27 MHz. The PCR is simply a snapshot of this encoder system time  
10 clock for a particular program. As depicted in FIG. 3, the PCR comprises a 33-bit PCR base field of a 90 KHz, a 9-bit PCR extension of a 27 MHz, and a 6-bit reserved field for byte alignment. The 9-bit PCR extension provides a modulo-300 counter that is incremented at 37 ns intervals, whereas  
15 the 33-bit PCR base is incremented at  $0.11\mu\text{s}$  intervals.

The PCR, therefore, can represent from 0 s up to 95443.7 s.

The transmitted transport stream is received by a set top box at the receiver and demultiplexed into transport streams of a plurality of programs. If a desired program is  
20 selected from among the demultiplexed programs, a transport stream depacketizer 21 of the system decoder as shown FIG. 2 contained in the set top box extracts the PCR values from the transport stream of the selected program, thereby enabling to synchronize the decoder system clock with the  
25 encoder system clock.

The value of  $\text{PCR}(i)$  is a count which reflects the value of the encoder system clock for the associated program at the time the  $i$ -th PCR bytes were inserted into the transport stream. Since the decoder do not know the  
30 value of  $\text{PCR}(i)$  until it receives  $\text{PCR}(i)$ , there is a time difference between the encoder and decoder due to transmission a time delay. The time delay, however, is negligible because the decoder clock is synchronized with

the encoder clock using the detected PCR values

A PES depacketizer 22 in the decoder of FIG. 2 depacketizes the PES packets yielded by transport stream depacketizer 21 into elementary streams and extracts the DTSSs and PTSSs. An audio/video decoder 24 adjusts the decoding clock of the elementary streams using the PCRs and DTSSs. The presentation time of the decoded audio and video signals are adjusted using the PCRs and PTSSs and finally the decoded audio and video signals are outputted to A/V output devices such as television sets.

It is also possible to store the received digital broadcast signals on a storage medium instead of directly outputting the received broadcast signals to A/V output devices. The stored digital broadcast signals can be edited and presented afterwards. For example, the digital data stream received by a set top box can be stored in a streamer such as a digital video disk (DVD) through communication interfaces like an IEEE-1394 isochronous bus. Later, the stored digital data stream can be edited and transmitted back to the set top box so that the original digital audio and video data can be presented.

The system clock frequency of digital broadcast transport streams based upon the MPEG format is 27 MHz, whereas that of the IEEE-1394 isochronous bus is 24.576 MHz. A DVD recording/reproducing apparatus as a streamer uses the system clock of 27 MHz. Hence, if transport streams using the system clock of 27 MHz are transmitted through the IEEE-1394 isochronous bus using the system clock of 24.576 MHz, the time interval between two successive transport stream packets can change because of the different system clock frequencies.

For each program carried in a given transport stream, PCRs must be generated at least once every 100 ms and

inserted into the transport stream packets carrying one of the elementary streams that make up that program. Not every transport stream packet, therefore, contains the PCR.

Suppose that the time interval between a transport stream packet without a PCR and its preceding packet has changed while transmitted through the IEEE-1394 isochronous bus. If the transport stream packets are recorded by a DVD recording/reproducing apparatus, it may cause a serious problem when reproducing the transport stream because the time interval remains wrong at the time the transport stream is transmitted through the IEEE-1394 isochronous bus back to the set top box.

Currently, the transport stream is required to contain a PCR that has a frequency tolerance of 30 ppm (parts per million). If the time intervals between transport stream packets are drastically distorted by the IEEE-1394 isochronous bus, the required frequency tolerance may not be guaranteed.

#### SUMMARY OF THE INVENTION

It is an object of the present invention to provide a method and apparatus for recording a digital data stream. When recording a digital data stream transmitted through a communication interface in a streamer, transport time references of transport stream packets are created and added to the data stream, the transport time references being synchronized with program clock references inserted in the transport stream packets.

The method for recording a digital data stream in accordance with the present invention comprises detecting program clock references contained in received digital transport stream packets, creating the transport time

reference for each transport stream packet based upon the  
detected program clock references and arrival times of the  
transport stream packets, and creating transport stream  
units by adding each of the created transport time  
5 reference to the associated transport stream packet.

The apparatus for recording a digital data stream in  
accordance with the present invention comprises a means for  
detecting program clock reference values contained in  
received digital transport stream packets, a means for  
10 comparing the detected program clock reference values with  
the arrival times of the transport stream packets, a means  
for creating the transport time reference of each transport  
stream packet based upon the comparison result, and a means  
for constructing transport stream units by adding the  
15 transport time reference of each transport stream packet to  
the associated transport stream packet.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

The accompanying drawings, which are included to  
provide a further understanding of the invention,  
20 illustrate the preferred embodiments of the invention, and  
together with the description, serve to explain the  
principles of the present invention.

In the drawings:

FIG. 1 is a block diagram of an MPEG encoder depicted  
25 for explaining the procedure by which time stamps are  
recorded in a transport stream;

FIG. 2 is a block diagram of an MPEG decoder depicted  
for explaining the procedure by which a transport stream is  
decoded using the time stamps contained in a transport  
30 stream;

FIG. 3 is a pictorial representation of the syntax of



a transport stream;

FIG. 4 is an apparatus in which a preferred embodiment of the invention may be practiced;

FIG. 5a is a pictorial representation of the syntax of a data stream transmitted through the communication interface shown in FIG. 4;

FIG. 5b is a pictorial representation of the syntax of a data stream stored in the streamer shown in FIG. 4;

FIG. 6 is a block diagram for explaining the method to compensate the clock references of a transport stream distorted by the communication interface shown in FIG. 4; and

FIG. 7 is an apparatus for compensating the clock references of a transport stream in accordance with an embodiment of the present invention.

#### **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS**

In order that the invention may be fully understood, preferred embodiments thereof will now be described with reference to the accompanying drawings.

FIG. 4 depicts a system in which the present invention may be advantageously employed, comprising a set top box 100, a communication interface (IEEE-1394), and a streamer 200.

Receiving a transport stream into which a plurality of programs are multiplexed, set top box 100 demultiplexes the transport stream into different types of transport stream packets, decodes the transport stream of a user-chosen program by a system decoder 110, and presents the decoded transport stream through a television set or transmits the chosen transport stream through an IEEE-1394 isochronous bus to streamer 200 for storing the program.

A digital transport processing unit 120 interfacing in the IEEE-1394 bus divides the transport stream of the chosen program into 188-byte transport stream packets using a system clock of 24.576 MHz generated by a clock

5 controller 130 and adds a 4-byte transport header to each transport stream packet as shown in FIG. 5a before transmitting the transport stream through a IEEE-1394 isochronous bus. The transport header includes a time stamp (TS1) expressed in terms of the system clock of 24.576 MHz.

10 Receiving the transport stream transmitted through the IEEE-1394 isochronous bus from set top box 100, a digital receiving processing unit 210 included in streamer 200 outputs transport stream packets after removing the time stamps (TS1s) from the transport headers. A stream

15 recording unit 230 receives the transport stream from digital receiving processing unit 210, converts the transport stream into a program stream the syntax of which is shown in FIG. 5b, and records the program stream on a recording medium 250 such as a DVD. The program stream

20 stored on recording medium 250 may comprise units containing a 2048-byte pack, a 12-byte unit block ID code, and a 4-byte cyclic redundancy check (CRC) code. The pack may further comprise a plurality of transport stream packets (for example, 10 packets), an application header (Appl. Header) regarding the packets, a substream ID (Substr. ID) code, a program elementary stream (PES) header, and a pack header having a system clock reference (SCR).

As shown in FIG. 6, while the transport stream packets are transmitted from set top box 100 through the 30 IEEE-1394 interface to stream recording unit 230, the time interval between two successive transport stream packets undergoes a change because the clock frequency of the transport stream packets is different from that of the

IEEE-1394 communication interface.

To solve such a problem, stream recording unit 230 compensates the arrival time of each transport stream packet using a compensation method to be explained in detail below and records the transport stream in the format shown in FIG. 5b after adding a transport time reference corresponding to the compensated arrival time to each transport stream header.

A stream reproducing unit 260 retrieves the original transport stream from streamer 200 and outputs the transport stream to a digital transport processing unit 270. Receiving the retrieved transport stream, a digital transport processing unit 270 of the streamer 200 extracts transport stream packets from the transport stream and adds a 4-byte transport header having a time stamp of a clock of 24.576 MHz to each extracted transport stream packet as shown in FIG. 5a. Then the transport stream packets are transmitted through the IEEE-1394 isochronous bus to set top box 100, the transmission of the transport stream packets being synchronized with the transport time reference values of the transport stream.

In set top box 100, a digital receiving processing unit 140 receives the transport stream from streamer 200 and extracts time stamps contained in the transport headers. Using the extracted time stamps and the system clock of 24.576 MHz, transport stream packets are outputted to system decoder 110.

The method and apparatus for compensating clock references using PCRs contained in transport stream packets transmitted through the IEEE-1394 communication interface will be explained in detail with reference to FIGS. 6 and 7. It is assumed that PCR values are contained only in transport stream packets P1, P4, and P3 shaded in FIG. 6.

If a PCR detector 50 detects a PCR value contained in the transport stream packet P1, a subtracter 51 subtracts the output of a counter 57 from the PCR value. Subtractor 51 ignores the offset, initial difference between the PCR value and the output of counter 57 in subtraction operations. The subtraction result, which is a digital error signal (e1), is converted into an analog error signal and applied to a low-pass filter 53. The low-pass filtered error signal is then applied to a voltage-controlled oscillator (VCO) 55, thereby adjusting the oscillation frequency of VCO 55 so that the oscillator clock can be locked with the PCR value. The digital error signal (e1), the PCR value, and the counter value (t1) at the time the transport stream packet P1 is received are temporarily stored in a buffer 59 and the transport stream packet P1 is stored in a buffer 63.

If a second and third transport stream packets P2 and P3 having no PCR values are received, the outputs of counter 57 are temporarily stored in buffer 59 as temporary transport time references of the transport stream packets and the transport stream packets P2 and P3 are sequentially stored in buffer 63.

Subsequently, when the PCR value of a forth transport stream packet P4 is detected by PCR detector 50, subtractor 57 subtracts the value of counter 57 from the detected PCR value. The oscillation frequency of VCO 55 is adjusted based upon the subtraction result (e4). Also, the error signal (e4), the counter value (t4), and the PCR value are temporarily stored in buffer 59 and the transport stream packet P4 is stored in buffer 63.

Next, a compensation unit 61 loads the PCR value of the first transport stream packet P1 from buffer 59 and transmits the PCR value to a time stamper 64. Time stamper

64 reads the first transport stream packet P1 from buffer 63 and records the received PCR value in the header of the transport stream packet P1 as a receiving time stamp, which will be used as a time reference for transmitting the transport stream packet P1 in playback. Then compensation unit 61 calculates the transport time references of the second and third transport stream packets P2 and P3 in the following way. First, the time interval  $\Delta t$  between the counter values  $t_1$  and  $t_4$  is calculated. Second, the difference  $\Delta t_2$  between  $t_1$  and the temporary clock reference of P2 stored in buffer 59 is calculated. Likewise, the difference  $\Delta t_3$  between  $t_1$  and the temporary clock reference of P3 stored in buffer 59 is calculated. Then, the difference  $\Delta p$  between the PCR values of the transport stream packets P1 and P4 is calculated. The difference between  $\Delta t$  and  $\Delta p$  is denoted by the error  $\Delta e$ , which will be used to compensate the temporary transport time reference values of P2 and P3.

The values  $\Delta \text{ex} \Delta t_2 / \Delta t$  and  $\Delta \text{ex} \Delta t_3 / \Delta t$  are added to  
20 the temporary transport time reference values of P2 and P3  
respectively and the compensated transport time reference  
values are transmitted to time stamper 64. Time stamper 64  
loads the transport stream packets P2 and P3 from buffer 63  
and records each received compensated transport time  
25 reference value in the header of the associated transport  
stream packet as a recording time stamp. Then compensation  
unit 61 loads the PCR value of the transport stream packet  
P4 from buffer 59 and outputs the value to time stamper 64.  
Time stamper 64 loads the transport stream packet P4 from  
30 buffer 63 and records the received PCR value in the header  
of the transport stream packet P4 as a recording time stamp.

The same procedure is repeated for the following

transport stream packets P5, P6, ... Pn and therefore the temporary transport time reference values of the transport stream packets distorted by the digital communication interface can be compensated.

5       As explained so far, stream recording unit 230 in streamer 200 compensates the transport time references of transport stream packets based on the PCR values before recording the transport stream packets. For presentation of the transport stream, the stored transport stream packets  
10 are transmitted through the IEEE-1394 isochronous bus to set top box 100. Even though the time intervals of the transport stream packets are distorted when transmitted to streamer 200, the time intervals of the transport stream packets remain compensate when transmitted to set top box  
15 100 for presentation.

The invention may be embodied in other specific forms without departing from the spirit or essential characteristics thereof. For example, unlike the previous embodiment, it is also possible that set top box 100  
20 creates PCR values for transport stream packets with no PCR values and inserts the created PCR values to associated transport stream packets before transmitting the transport stream packets through the IEEE-1394 isochronous interface to streamer 200. In this case, since every transport stream  
25 packet contains a PCR, the decoder clock can be adjusted precisely using the PCR values though the time intervals between consecutive transport stream packets are distorted by the IEEE-1394 interface.

According to the apparatus and method for  
30 compensating the transport time references of a digital data stream, failures in a seamless presentation of data retrieved from a streamer can be prevented in the streamer, though program clock references contained in the data

stream become different from the actual arrival time of the digital data stream because of different clock frequencies of the digital data stream and the IEEE-1394 communication interface and the digital data is stored on the streamer as  
5 transmitted.

The present embodiments are therefore to be considered in all respects as illustrative and not restrictive, the scope of the invention being indicated by the appended claims rather than by the foregoing  
10 description and all changes which come within the meaning and range of equivalency of the claims are therefore intended to be embraced therein

**What is claimed is:**

1. A method for creating digital transport stream  
15 units, comprising the steps of:

(a) detecting program clock references contained in received digital transport stream packets;

(b) creating the transport time reference for each transport stream packet based upon the detected program  
20 clock references and arrival times of the correspondent transport stream packet; and

(c) creating transport stream units by adding each of the created transport time reference to the associated transport stream packet.

25 2. A method set forth in claim 1, wherein said step (b) creates the transport time reference of each transport stream packet based upon an error, defined as the difference between the time difference of selectively inserted program clock references and the arrival time  
30 difference of transport stream packets containing the program clock references.

3. A method set forth in claim 2, wherein said step

(b) increases or decreases the transport time reference by the time corresponding to said error.

4. A method set forth in claim 2, wherein said step (b) creates the transport time reference for an arbitrary transport stream packet received between two transport stream packets having program clock references by compensating the arrival time of the arbitrary transport stream packet by the amount corresponding to the proportion of the arrival time difference between the arbitrary transport stream packet and a first transport stream packet of said two packets to the arrival time difference of said two transport stream packets.

5. A method set forth in claim 1, wherein said transport time reference is the reference information upon which the timing of the transmission of the transport stream packets is based when the transport packets are transmitted to an external device after the transport stream packets are reproduced from a storage medium.

6. A method set forth in claim 1, further comprising a step of recording the created transport stream units on a rewritable recording medium having a digital data recording format.

7. A method for creating digital transport stream units, comprising the steps of:

(a) storing received digital transport stream packets together with their arrival times temporarily;

(b) compensating the temporarily stored arrival time of each transport stream packet based upon the time difference of program clock references and the arrival time difference of the transport stream packets when more than two program clock references are detected from said received digital transport stream packets; and

(c) creating transport stream units by adding each of



the compensated arrival times to the associated transport stream packet as a transport time reference.

8. A method for creating digital transport stream units, comprising the steps of:

5 (a) detecting program clock references from received transport stream packets while storing the received digital transport stream packets together with their arrival times;

(b) detecting the stored arrival times of the transport stream packets containing the detected program  
10 clock references;

(c) comparing the difference of the two program clock references detected in said step (a) with the arrival time difference of the two transport stream packets detected in said step (b);

15 (d) compensating the stored arrival time of each transport stream packet based upon the comparison result; and

(e) creating transport stream units by adding the compensated arrival time to each transport stream packet as  
20 a transport time reference

9. An apparatus for recording digital transport streams, comprising:

a means for detecting program clock references contained in received digital transport stream packets;

25 a means for comparing the detected program clock references with the arrival times of the transport stream packets;

a means for creating the transport time reference of said each transport stream packet based upon the comparison  
30 result; and

a means for constructing transport stream units by adding the created transport time reference of said each transport stream packet to the associated transport stream

packet.

10. An apparatus for recording digital transport streams, comprising:

- a means for creating arrival times of received  
5 digital transport stream packets ;
- a means for detecting program clock references contained in the received digital transport stream packets;
- a means for comparing the detected program clock references with the created arrival times;
- 10 a means for compensating the created arrival times based upon the comparison result; and
- a means for constructing transport stream units by adding the compensated arrival times to the corresponding transport stream packets as transport time references.

15 11. An apparatus set forth in claim 10, wherein said compensating means compensates the created arrival times of the received digital transport stream packets so that the difference between the detected program clock references equals to the difference between the arrival times of the  
20 transport stream packets containing the detected program clock references.

12. An apparatus for recording digital transport streams, comprising:

time information extractor of detecting program clock  
25 references contained in received digital transport stream packets;

time comparator of comparing the detected program clock references from said time information extractor with the arrival times of the transport stream packets;

30 transport time generator of creating the transport time reference of said each transport stream packet based upon the comparison result from said time comparator; and  
data constructor of constructing transport stream

units by adding the created transport time reference from said transport time generator of said each transport stream packet to the associated transport stream packet.

13. An apparatus set forth in claim 12, wherein said  
5 transport time generator creates the transport time reference of each transport stream packet based upon an error, defined as the difference between the time difference of the detected program clock references and the arrival time difference of transport stream packets  
10 containing the program clock references.

14. An apparatus set forth in claim 13, wherein said transport time generator increases or decreases the transport time reference by the time proportional to said error.

15 15. An apparatus set forth in claim 13, wherein said transport time generator creates the transport time reference for an arbitrary transport stream packet received between two transport stream packets having program clock references by compensating the arrival time of the  
20 arbitrary transport stream packet by the amount corresponding to the proportion of the arrival time difference between the arbitrary transport stream packet and a first transport stream packet of said two packets to the arrival time difference of said two transport stream  
25 packets.

16. An apparatus for recording digital transport streams, comprising:

transport time generator of creating arrival times of received digital transport stream packets ;

30 time information extractor of detecting program clock references contained in the received digital transport stream packets;

time comparator of comparing the detected program

clock references from said time information generator with the created arrival times from said transport time generator;

time compensator of compensating the created arrival  
5 times from said transport time generator based upon the comparison result of said time comparator; and

data constructor of constructing transport stream units by adding the compensated arrival times from said time compensator to the corresponding transport stream  
10 packets as transport time references.

17. An apparatus set forth in claim 16, wherein said time compensator compensates the created arrival time based upon an error, defined as the difference between the time difference of the detected program clock references and the  
15 arrival time difference of transport stream packets containing the program clock references.


18. An apparatus set forth in claim 17, wherein said time compensator increases or decreases the created arrival time by the time proportional to said error.

20 19. An apparatus set forth in claim 17, wherein said time compensator compensate the created arrival time of an arbitrary transport stream packet received between two transport stream packets having program clock references by the amount corresponding to the proportion of the arrival  
25 time difference between the arbitrary transport stream packet and a first transport stream packet of said two packets to the arrival time difference of said two transport stream packets.

## ABSTRACT


A method and apparatus for recording digital data streams. When a digital broadcast data stream received by a set top box is transmitted through a communication interface such as an IEEE-1394 bus to a streamer, program clock references contained in the data stream become different from the actual arrival time of the digital data stream because of different clock frequencies of the digital data stream and communication interface. The difference is compensated before the digital data stream is recorded on the streamer. The method in accordance with the present invention comprises detecting program clock references contained in received digital transport stream packets, creating the transport time reference of each transport stream packet based upon the detected program clock references and arrival times of the transport stream packets, and creating transport stream units by adding each of the created transport time reference to the associated transport stream packet.

**FIG. 1**

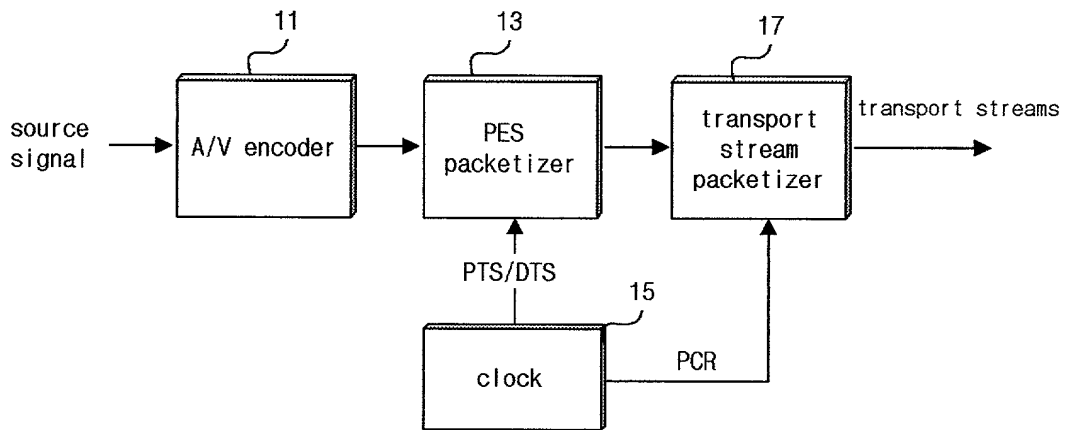


*Conventional Art*

**FIG. 2**

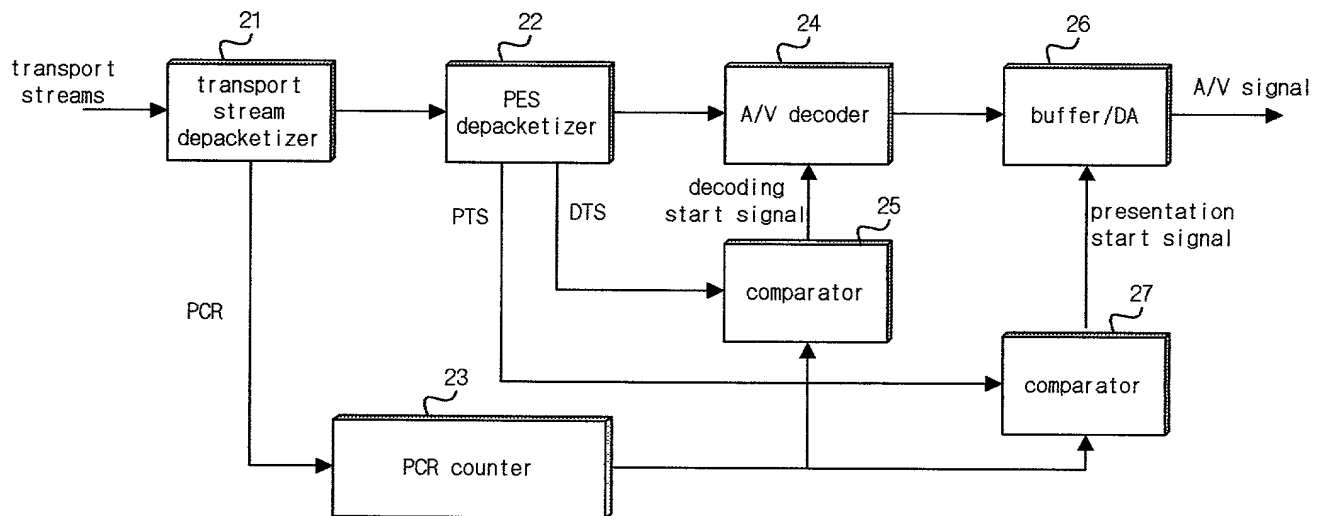


*Conventional Art*

FIG. 3

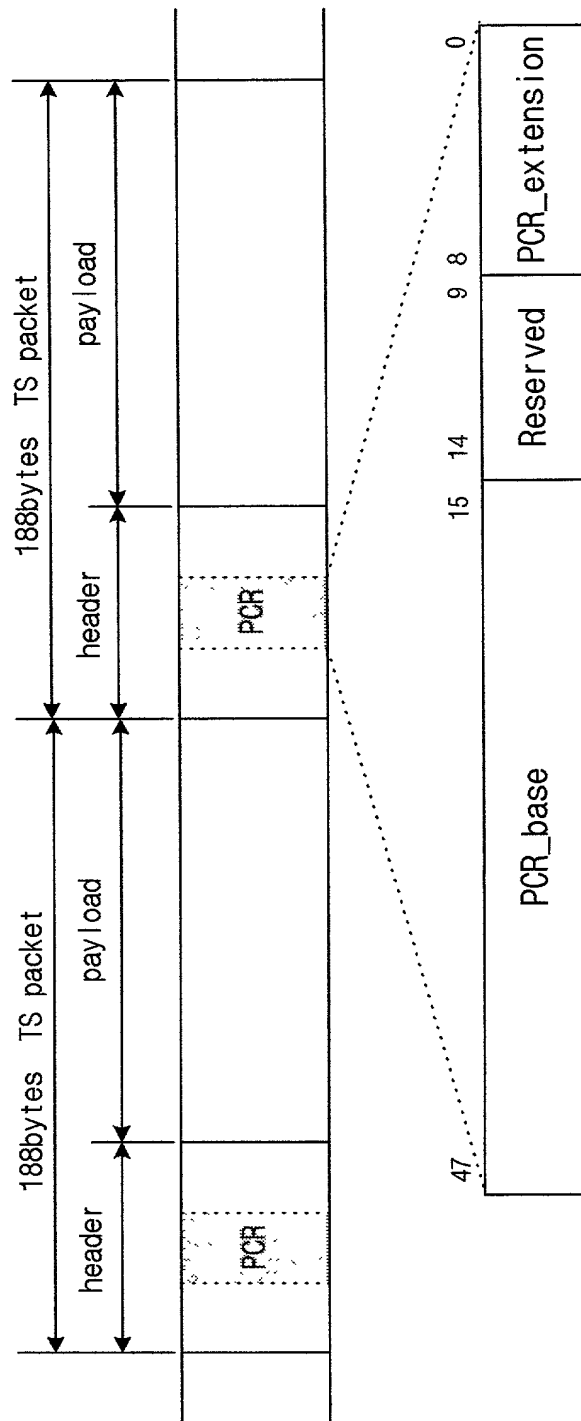

*Conventional Art*


FIG. 4

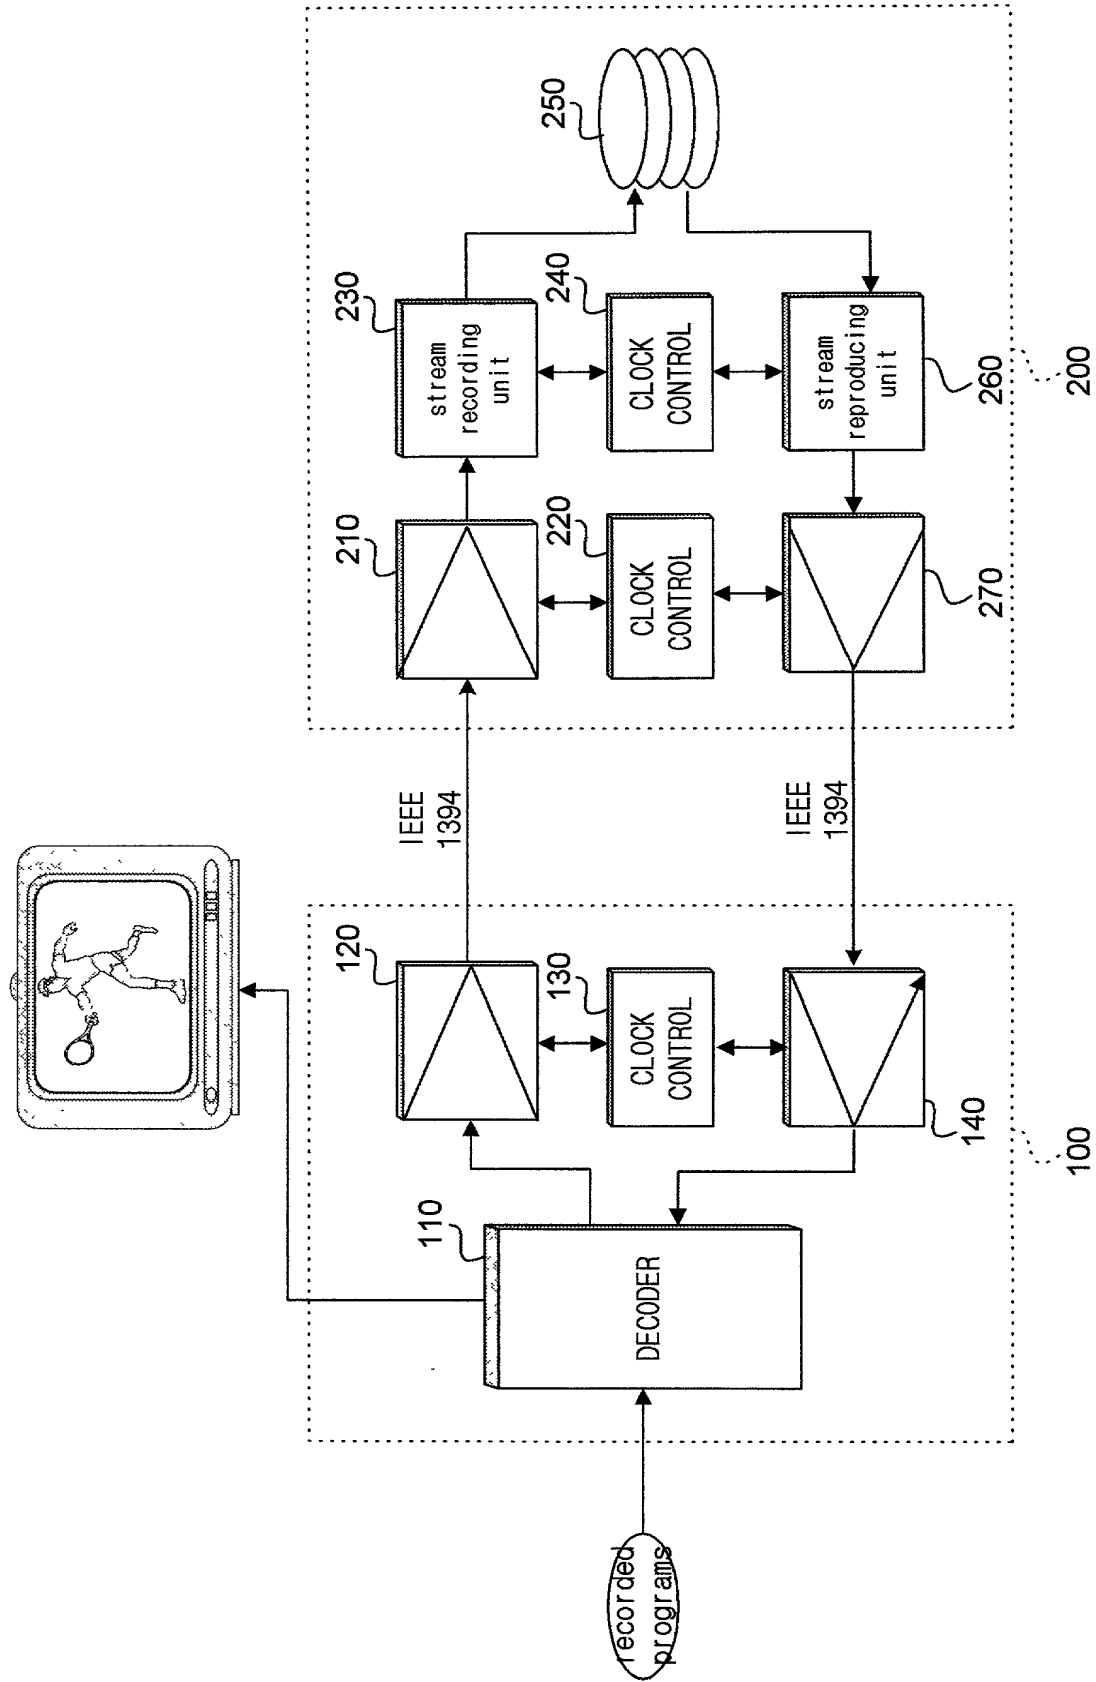

Conventional Art




**FIG. 5A**

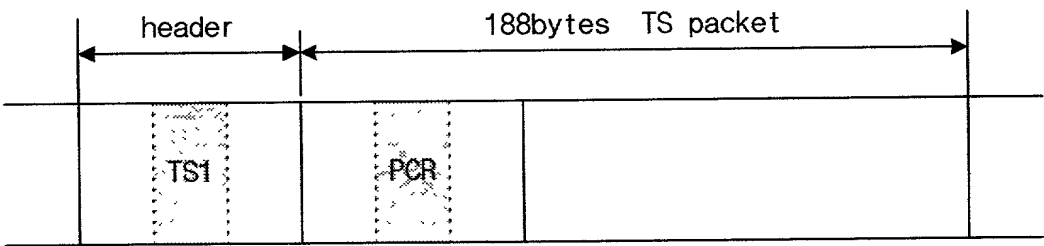

*Conventional Art*

**FIG. 5B**

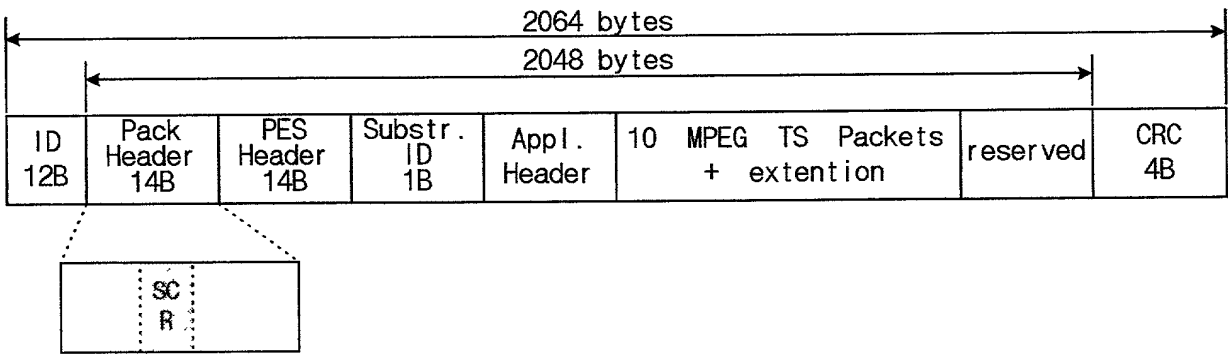

*Conventional Art*

FIG. 6


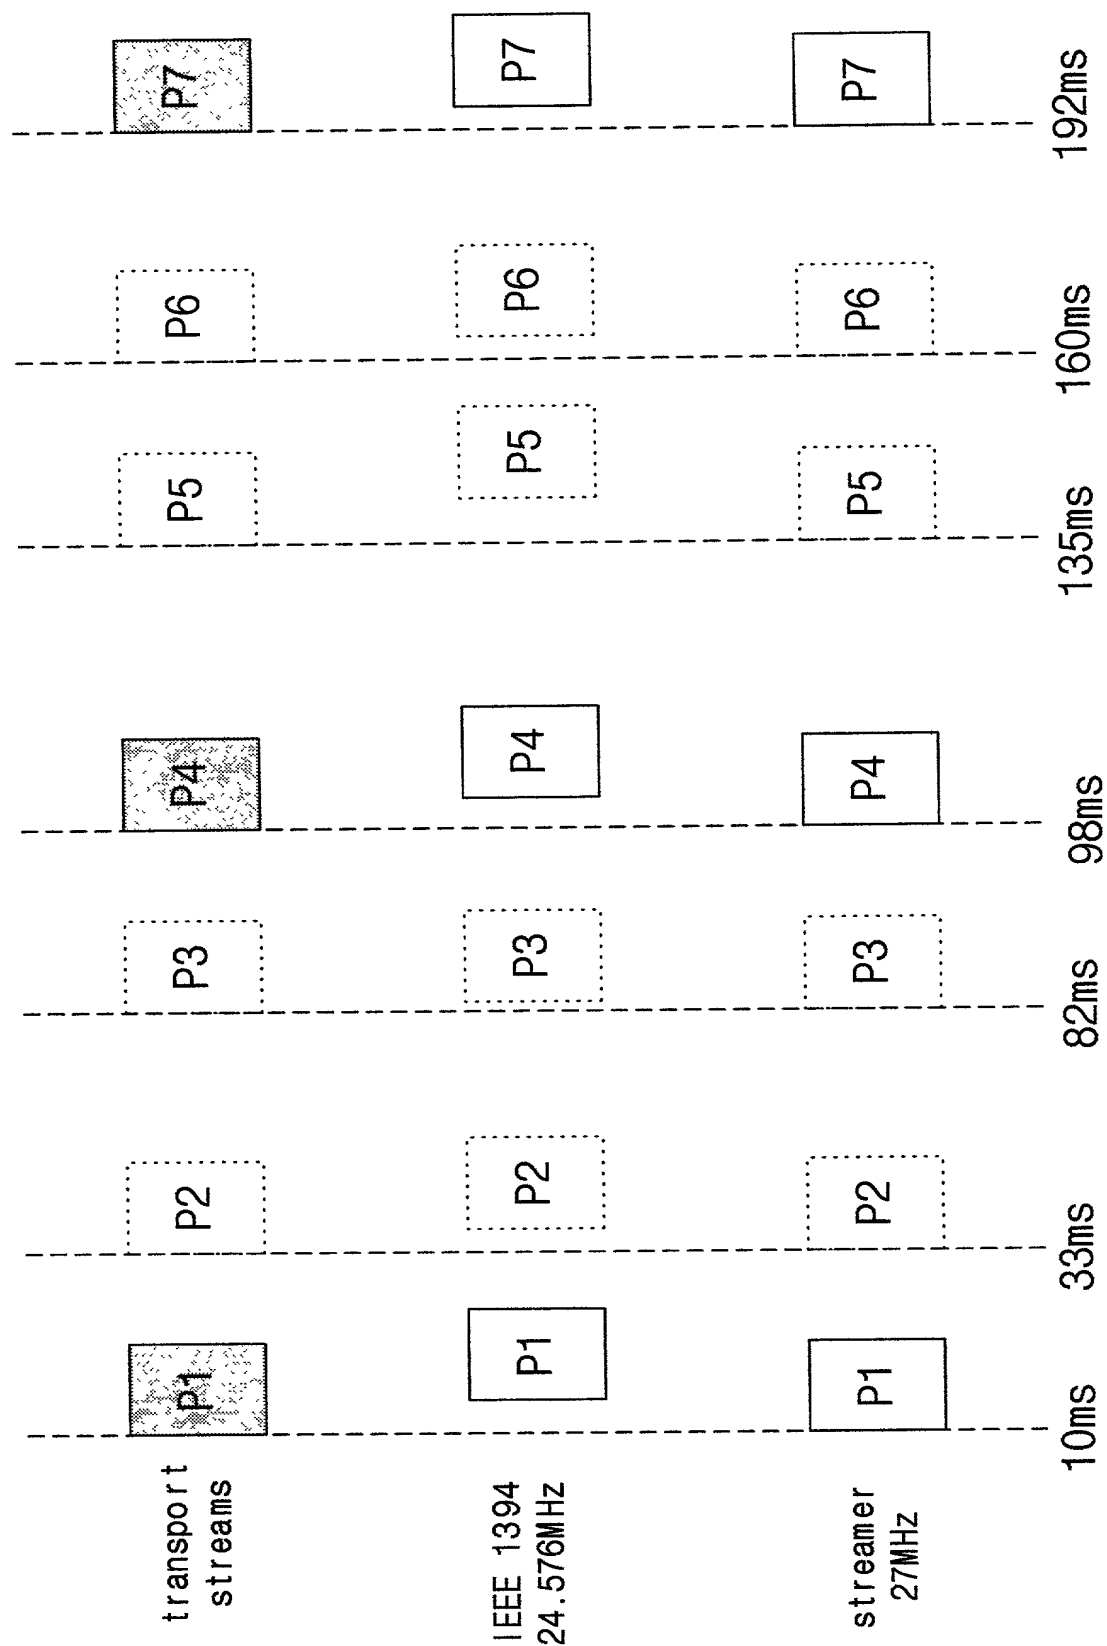


FIG. 7

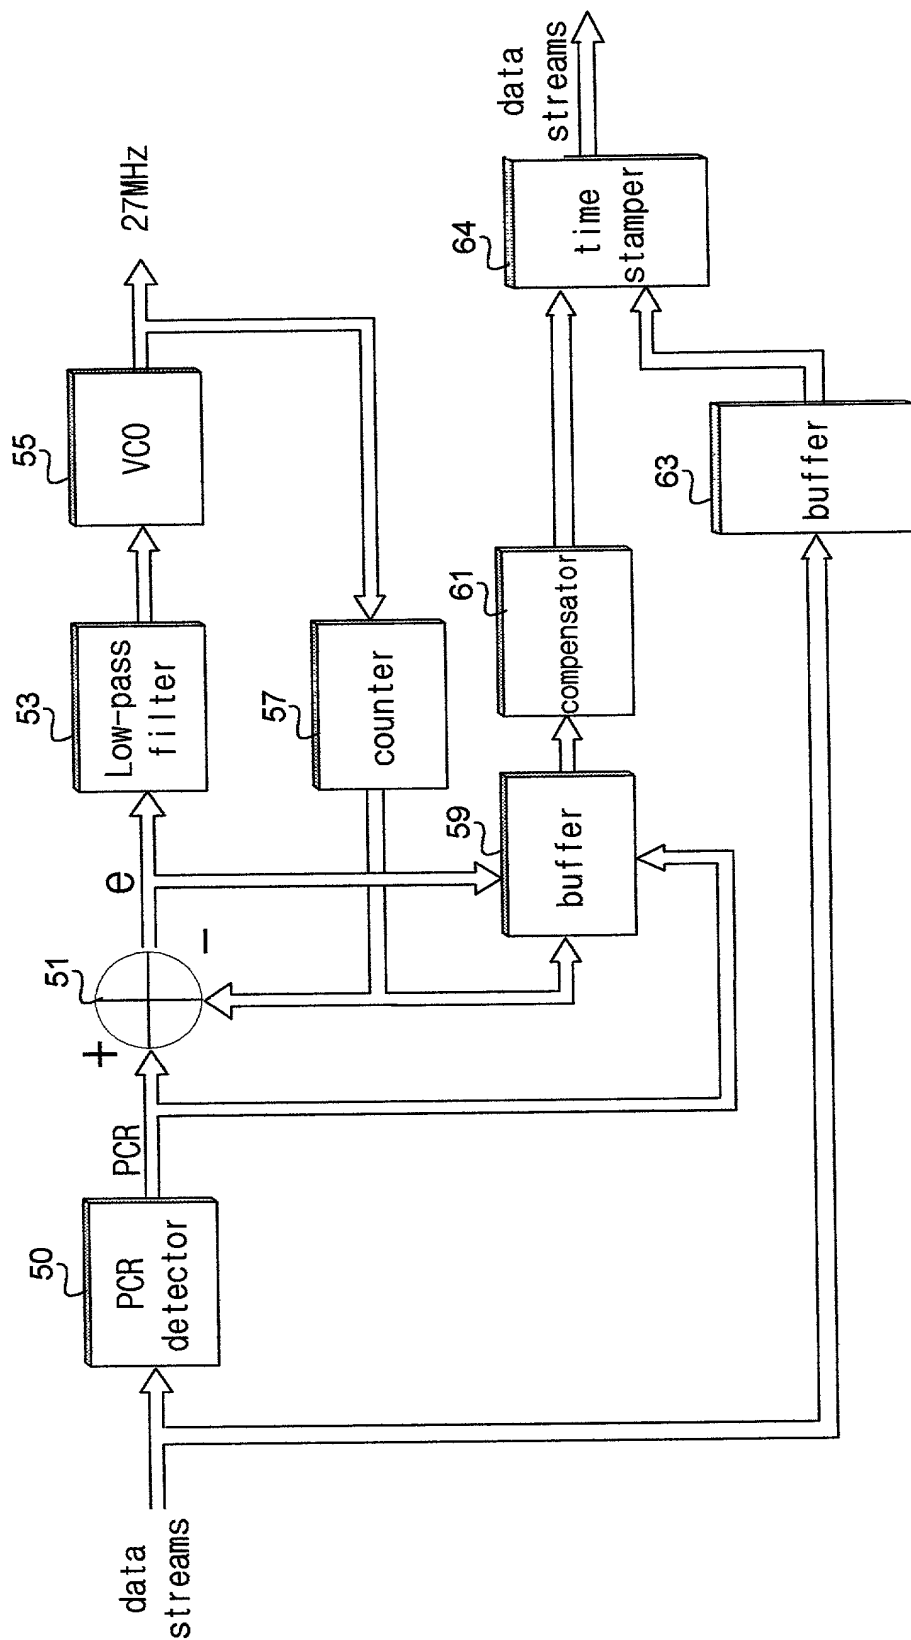

# BIRCH, STEWART, KOLASCH & BIRCH, LLP

PLEASE NOTE:  
YOU MUST  
COMPLETE THE  
FOLLOWING:

## COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT AND DESIGN APPLICATIONS

ATTORNEY DOCKET NO  
2950-138P

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated next to my name; that I verily believe that I am the original, first and sole inventor (if only one inventor is named below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Insert Title: **METHOD AND APPARATUS FOR RECORDING DIGITAL DATA STREAMS**

Fill in Appropriate  
Information -  
For Use Without  
Specification  
Attached:

the specification of which is attached hereto. If not attached hereto,  
the specification was filed on \_\_\_\_\_ as  
United States Application Number \_\_\_\_\_; and /or  
the specification was filed on \_\_\_\_\_ as PCT  
International Application Number \_\_\_\_\_; and was  
amended under PCT Article 19 on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (six months for designs) prior to this application, and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns, except as follows.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 (a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Insert Priority  
Information:  
(if appropriate)

Prior Foreign Application(s)			Priority Claimed	
98-41937	Korea	10/02/98	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
(Number)	(Country)	(Month/Day/Year Filed)		
			<input type="checkbox"/> Yes	<input type="checkbox"/> No
(Number)	(Country)	(Month/Day/Year Filed)		
			<input type="checkbox"/> Yes	<input type="checkbox"/> No
(Number)	(Country)	(Month/Day/Year Filed)		
			<input type="checkbox"/> Yes	<input type="checkbox"/> No
(Number)	(Country)	(Month/Day/Year Filed)		
			<input type="checkbox"/> Yes	<input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code, §119(c) of any United States provisional application(s) listed below.

Insert Provisional  
Application(s):  
(if any)

(Application Number)	(Filing Date)
(Application Number)	(Filing Date)

All Foreign Applications, if any, for any Patent or Inventor's Certificate Filed More Than 12 Months (6 Months for Designs) Prior To The Filing Date of This Application:

Insert Requested  
Information:  
(if appropriate)

Country	Application No	Date of Filing (Month/Day/Year)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Insert Prior U.S.  
Application(s):  
(if any)

(Application Number)	(Filing Date)	(Status - patented, pending, abandoned)
(Application Number)	(Filing Date)	(Status - patented, pending, abandoned)

I hereby appoint the following attorneys to prosecute this application and/or an international application based on this application and to transact all business in the Patent and Trademark Office connected therewith and in connection with the resulting patent based on instructions received from the entity who first sent the application papers to the attorneys identified below, unless the inventor(s) or assignee provides said attorney with a written notice to the contrary:

Terrell C. Birch	(Reg. No. 19,382)	Raymond C. Stewart	(Reg. No. 21,066)
Joseph A. Kolasch	(Reg. No. 22,463)	James M. Slattery	(Reg. No. 28,380)
Bernard L. Sweeney	(Reg. No. 24,448)	Michael K. Mutter	(Reg. No. 29,680)
Charles Gorenstein	(Reg. No. 29,271)	Gerald M. Murphy, Jr.	(Reg. No. 28,977)
Leonard R. Svensson	(Reg. No. 30,330)	Terry L. Clark	(Reg. No. 32,644)
Andrew D. Meikle	(Reg. No. 32,868)	Marc S. Weiner	(Reg. No. 32,181)
Joe McKinney Muncy	(Reg. No. 32,334)	Andrew F. Reish	(Reg. No. 33,443)
C. Joseph Faraci	(Reg. No. 32,350)	Donald J. Daley	(Reg. No. 34,313)

Send Correspondence to:

**BIRCH, STEWART, KOLASCH & BIRCH, LLP**

**P.O. Box 747 • Falls Church, Virginia 22040-0747**

**Telephone: (703) 205-8000 • Facsimile: (703) 205-8050**

PLEASE NOTE:  
YOU MUST  
COMPLETE THE  
FOLLOWING:



I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First or Sole  
Inventor:  
Insert Name of Inventor  
Insert Date This  
Document is Signed

Insert Residence  
Insert Citizenship

Insert Post Office  
Address

Full Name of Second  
Inventor, if any:

see above

Full Name of Third  
Inventor, if any

see above

Full Name of Fourth  
Inventor, if any

see above

Full Name of Fifth  
Inventor, if any

see above

GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Jea-Yong	Yoo	<i>Jea-Yong Yoo</i>	99.9.18
Residence (City, State & Country)		CITIZENSHIP	
Seoul, Korea		Republic of Korea	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
C-306, Maebong Samsung APT., Dogok-dong, Kangnam-gu, Seoul, 135-270 Korea			
GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Byung-Jin	Kim	<i>Byung-Jin Kim</i>	99.9.18
Residence (City, State & Country)		CITIZENSHIP	
Kyunggi-do, Korea		Republic of Korea	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
111-204, Hansol Cheonggu APT., 110, Jeongja-dong, Bundang-gu, Seongnam, Kyunggi-do, 463-010 Korea			
GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Kang-Soo	Seo	<i>Kang-Soo Seo</i>	99.9.18
Residence (City, State & Country)		CITIZENSHIP	
Kyunggi-do, Korea		Republic of Korea	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
606-503, Chowon Hanyang APT., 897-5, Pyungan-dong, Dongan-gu, Anyang, Kyunggi-do, 431-075 Korea			
GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			

\* DATE OF SIGNATURE